


T F S G P寸法・重量表

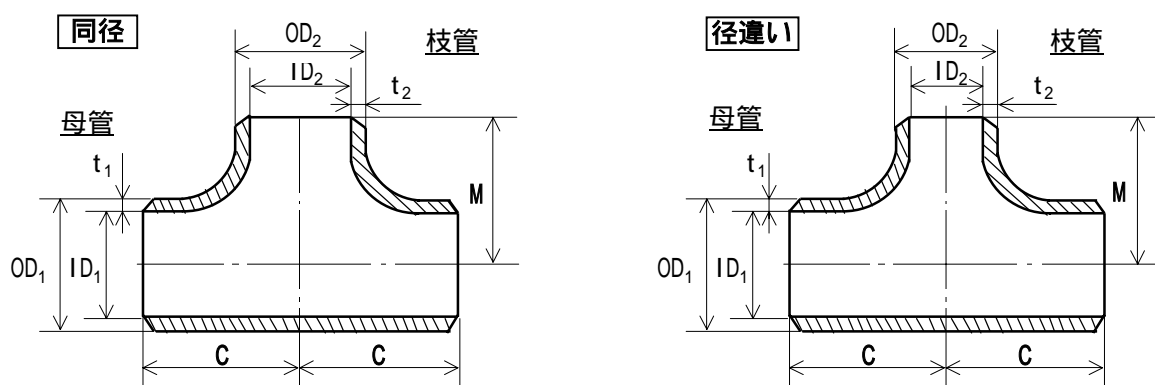


単位：mm

径の呼び(母管側 × 枝管側)		大径側			小径側			中心から端面までの距離		概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ	C	M	kg
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂			
15 × 15	1/2 × 1/2	21.7	16.1	2.8	21.7	16.1	2.8	25.4	25.4	0.085
20 × 20	3/4 × 3/4	27.2	21.6	2.8	27.2	21.6	2.8	28.6	28.6	0.122
15	1/2	27.2	21.6	2.8	21.7	16.1	2.8	28.6	28.6	0.116
25 × 25	1 × 1	34.0	27.6	3.2	34.0	27.6	3.2	38.1	38.1	0.236
20	3/4	34.0	27.6	3.2	27.2	21.6	2.8	38.1	38.1	0.221
15	1/2	34.0	27.6	3.2	21.7	16.1	2.8	38.1	38.1	0.213
32 × 32	1-1/4 × 1-1/4	42.7	35.7	3.5	42.7	35.7	3.5	47.6	47.6	0.411
25	1	42.7	35.7	3.5	34.0	27.6	3.2	47.6	47.6	0.386
20	3/4	42.7	35.7	3.5	27.2	21.6	2.8	47.6	47.6	0.366
15	1/2	42.7	35.7	3.5	21.7	16.1	2.8	47.6	47.6	0.356
40 × 40	1-1/2 × 1-1/2	48.6	41.6	3.5	48.6	41.6	3.5	57.2	57.2	0.573
32	1-1/4	48.6	41.6	3.5	42.7	35.7	3.5	57.2	57.2	0.556
25	1	48.6	41.6	3.5	34.0	27.6	3.2	57.2	57.2	0.525
20	3/4	48.6	41.6	3.5	27.2	21.6	2.8	57.2	57.2	0.500
15	1/2	48.6	41.6	3.5	21.7	16.1	2.8	57.2	57.2	0.488
50 × 50	2 × 2	60.5	52.9	3.8	60.5	52.9	3.8	63.5	63.5	0.851
40	1-1/2	60.5	52.9	3.8	48.6	41.6	3.5	63.5	60.3	0.791
32	1-1/4	60.5	52.9	3.8	42.7	35.7	3.5	63.5	57.2	0.766
25	1	60.5	52.9	3.8	34.0	27.6	3.2	63.5	50.8	0.724
20	3/4	60.5	52.9	3.8	27.2	21.6	2.8	63.5	44.5	0.698
15	1/2	60.5	52.9	3.8	21.7	16.1	2.8	63.5	44.5	0.693
65 × 65	2-1/2 × 2-1/2	76.3	67.9	4.2	76.3	67.9	4.2	76.2	76.2	1.42
50	2	76.3	67.9	4.2	60.5	52.9	3.8	76.2	69.9	1.31
40	1-1/2	76.3	67.9	4.2	48.6	41.6	3.5	76.2	66.7	1.25
32	1-1/4	76.3	67.9	4.2	42.7	35.7	3.5	76.2	63.5	1.22
25	1	76.3	67.9	4.2	34.0	27.6	3.2	76.2	57.2	1.18
80 × 80	3 × 3	89.1	80.7	4.2	89.1	80.7	4.2	85.7	85.7	1.87
65	2-1/2	89.1	80.7	4.2	76.3	67.9	4.2	85.7	82.6	1.79
50	2	89.1	80.7	4.2	60.5	52.9	3.8	85.7	76.2	1.67
40	1-1/2	89.1	80.7	4.2	48.6	41.6	3.5	85.7	73.0	1.62
32	1-1/4	89.1	80.7	4.2	42.7	35.7	3.5	85.7	69.9	1.59
25	1	89.1	80.7	4.2	34.0	27.6	3.2	85.7	69.9	1.57
90 × 90	3-1/2 × 3-1/2	101.6	93.2	4.2	101.6	93.2	4.2	95.3	95.3	2.37
80	3	101.6	93.2	4.2	89.1	80.7	4.2	95.3	92.1	2.28
65	2-1/2	101.6	93.2	4.2	76.3	67.9	4.2	95.3	88.9	2.20
50	2	101.6	93.2	4.2	60.5	52.9	3.8	95.3	82.6	2.09
100 × 100	4 × 4	114.3	105.3	4.5	114.3	105.3	4.5	104.8	104.8	3.13
90	3-1/2	114.3	105.3	4.5	101.6	93.2	4.2	104.8	101.6	3.00
80	3	114.3	105.3	4.5	89.1	80.7	4.2	104.8	98.4	2.92
65	2-1/2	114.3	105.3	4.5	76.3	67.9	4.2	104.8	95.3	2.84
50	2	114.3	105.3	4.5	60.5	52.9	3.8	104.8	88.9	2.72
40	1-1/2	114.3	105.3	4.5	48.6	41.6	3.5	104.8	85.7	2.66
32	1-1/4	114.3	105.3	4.5	42.7	35.7	3.5	104.8	85.7	2.65
25	1	114.3	105.3	4.5	34.0	27.6	3.2	104.8	85.7	2.62

径の呼び(母管側×枝管側)		大径側			小径側			中心から端面までの距離		概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ	C	M	kg
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂			
125×125	5×5	139.8	130.8	4.5	139.8	130.8	4.5	123.8	123.8	4.52
100	4	139.8	130.8	4.5	114.3	105.3	4.5	123.8	117.5	4.30
90	3-1/2	139.8	130.8	4.5	101.6	93.2	4.2	123.8	114.3	4.16
80	3	139.8	130.8	4.5	89.1	80.7	4.2	123.8	111.1	4.08
65	2-1/2	139.8	130.8	4.5	76.3	67.9	4.2	123.8	108.0	4.00
50	2	139.8	130.8	4.5	60.5	52.9	3.8	123.8	104.8	3.90
40	1-1/2	139.8	130.8	4.5	48.6	41.6	3.5	123.8	104.8	3.85
150×150	6×6	165.2	155.2	5.0	165.2	155.2	5.0	142.9	142.9	6.83
125	5	165.2	155.2	5.0	139.8	130.8	4.5	142.9	136.5	6.45
100	4	165.2	155.2	5.0	114.3	105.3	4.5	142.9	130.2	6.22
90	3-1/2	165.2	155.2	5.0	101.6	93.2	4.2	142.9	127.0	6.09
80	3	165.2	155.2	5.0	89.1	80.7	4.2	142.9	123.8	6.00
65	2-1/2	165.2	155.2	5.0	76.3	67.9	4.2	142.9	120.7	5.93
50	2	165.2	155.2	5.0	60.5	52.9	3.8	142.9	120.7	5.85
200×200	8×8	216.3	204.7	5.8	216.3	204.7	5.8	177.8	177.8	12.8
150	6	216.3	204.7	5.8	165.2	155.2	5.0	177.8	168.3	11.9
125	5	216.3	204.7	5.8	139.8	130.8	4.5	177.8	161.9	11.5
100	4	216.3	204.7	5.8	114.3	105.3	4.5	177.8	155.6	11.3
80	3	216.3	204.7	5.8	89.1	80.7	4.2	177.8	152.4	11.1
250×250	10×10	267.4	254.2	6.6	267.4	254.2	6.6	215.9	215.9	21.9
200	8	267.4	254.2	6.6	216.3	204.7	5.8	215.9	203.2	20.4
150	6	267.4	254.2	6.6	165.2	155.2	5.0	215.9	193.7	19.5
125	5	267.4	254.2	6.6	139.8	130.8	4.5	215.9	190.5	19.2
100	4	267.4	254.2	6.6	114.3	105.3	4.5	215.9	184.2	18.9
300×300	12×12	318.5	304.7	6.9	318.5	304.7	6.9	254.0	254.0	31.9
250	10	318.5	304.7	6.9	267.4	254.2	6.6	254.0	241.3	30.4
200	8	318.5	304.7	6.9	216.3	204.7	5.8	254.0	228.6	29.0
150	6	318.5	304.7	6.9	165.2	155.2	5.0	254.0	219.1	28.1
125	5	318.5	304.7	6.9	139.8	130.8	4.5	254.0	215.9	27.8
350×350	14×14	355.6	339.8	7.9	355.6	339.8	7.9	279.4	279.4	44.7
300	12	355.6	339.8	7.9	318.5	304.7	6.9	279.4	269.9	42.7
250	10	355.6	339.8	7.9	267.4	254.2	6.6	279.4	257.2	41.2
200	8	355.6	339.8	7.9	216.3	204.7	5.8	279.4	247.7	39.9
150	6	355.6	339.8	7.9	165.2	155.2	5.0	279.4	238.1	39.0
400×400	16×16	406.4	390.6	7.9	406.4	390.6	7.9	304.8	304.8	55.2
350	14	406.4	390.6	7.9	355.6	339.8	7.9	304.8	304.8	54.2
300	12	406.4	390.6	7.9	318.5	304.7	6.9	304.8	295.3	52.2
250	10	406.4	390.6	7.9	267.4	254.2	6.6	304.8	282.6	50.7
200	8	406.4	390.6	7.9	216.3	204.7	5.8	304.8	273.1	49.4
150	6	406.4	390.6	7.9	165.2	155.2	5.0	304.8	263.5	48.5
450×450	18×18	457.2	441.4	7.9	457.2	441.4	7.9	342.9	342.9	70.0
400	16	457.2	441.4	7.9	406.4	390.6	7.9	342.9	330.2	67.9
350	14	457.2	441.4	7.9	355.6	339.8	7.9	342.9	330.2	66.9
300	12	457.2	441.4	7.9	318.5	304.7	6.9	342.9	320.7	64.9
250	10	457.2	441.4	7.9	267.4	254.2	6.6	342.9	308.0	63.9
200	8	457.2	441.4	7.9	216.3	204.7	5.8	342.9	298.5	62.1
500×500	20×20	508.0	492.2	7.9	508.0	492.2	7.9	381.0	381.0	86.6
450	18	508.0	492.2	7.9	457.2	441.4	7.9	381.0	368.3	84.2
400	16	508.0	492.2	7.9	406.4	390.6	7.9	381.0	355.6	82.1
350	14	508.0	492.2	7.9	355.6	339.8	7.9	381.0	355.6	81.1
300	12	508.0	492.2	7.9	318.5	304.7	7.9	381.0	346.1	80.1
250	10	508.0	492.2	7.9	267.4	254.2	7.9	381.0	333.4	79.0
200	8	508.0	492.2	7.9	216.3	204.7	7.9	381.0	323.9	76.9

1. 印は日本工業規格(J I S)に含まれておりません。

T Sch 5 S寸法・重量表

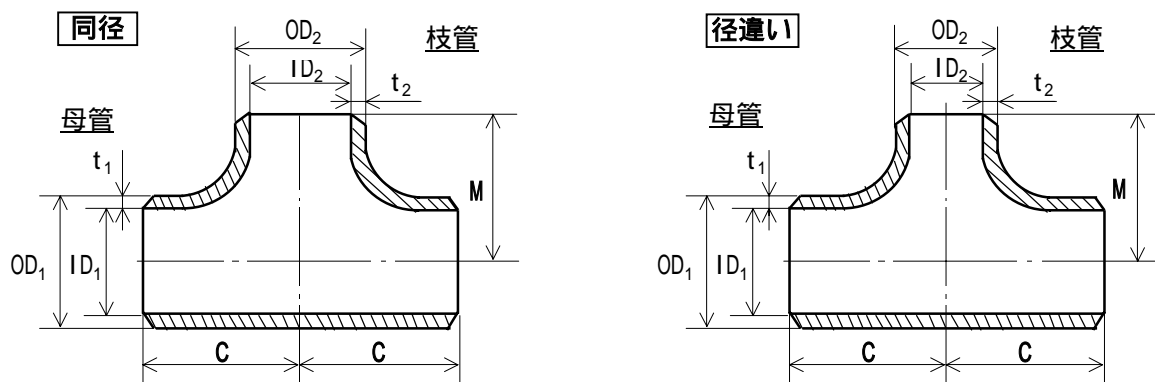

単位：mm


径の呼び(母管側 × 枝管側)		大径側			小径側			中心から端面までの距離		概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ	C	M	kg
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂			
15 × 15	1/2 × 1/2	21.7	18.4	1.65	21.7	18.4	1.65	25.4	25.4	0.053
20 × 20	3/4 × 3/4	27.2	23.9	1.65	27.2	23.9	1.65	28.6	28.6	0.075
15	1/2	27.2	23.9	1.65	21.7	18.4	1.65	28.6	28.6	0.072
25 × 25	1 × 1	34.0	30.7	1.65	34.0	30.7	1.65	38.1	38.1	0.128
20	3/4	34.0	30.7	1.65	27.2	23.9	1.65	38.1	38.1	0.122
15	1/2	34.0	30.7	1.65	21.7	18.4	1.65	38.1	38.1	0.117
32 × 32	1-1/4 × 1-1/4	42.7	39.4	1.65	42.7	39.4	1.65	47.6	47.6	0.203
25	1	42.7	39.4	1.65	34.0	30.7	1.65	47.6	47.6	0.193
20	3/4	42.7	39.4	1.65	27.2	23.9	1.65	47.6	47.6	0.186
15	1/2	42.7	39.4	1.65	21.7	18.4	1.65	47.6	47.6	0.180
40 × 40	1-1/2 × 1-1/2	48.6	45.3	1.65	48.6	45.3	1.65	57.2	57.2	0.281
32	1-1/4	48.6	45.3	1.65	42.7	39.4	1.65	57.2	57.2	0.273
25	1	48.6	45.3	1.65	34.0	30.7	1.65	57.2	57.2	0.262
20	3/4	48.6	45.3	1.65	27.2	23.9	1.65	57.2	57.2	0.253
15	1/2	48.6	45.3	1.65	21.7	18.4	1.65	57.2	57.2	0.245
50 × 50	2 × 2	60.5	57.2	1.65	60.5	57.2	1.65	63.5	63.5	0.384
40	1-1/2	60.5	57.2	1.65	48.6	45.3	1.65	63.5	60.3	0.361
32	1-1/4	60.5	57.2	1.65	42.7	39.4	1.65	63.5	57.2	0.349
25	1	60.5	57.2	1.65	34.0	30.7	1.65	63.5	50.8	0.331
20	3/4	60.5	57.2	1.65	27.2	23.9	1.65	63.5	44.5	0.319
65 × 65	2-1/2 × 2-1/2	76.3	72.1	2.1	76.3	72.1	2.1	76.2	76.2	0.731
50	2	76.3	72.1	2.1	60.5	57.2	1.65	76.2	69.9	0.661
40	1-1/2	76.3	72.1	2.1	48.6	45.3	1.65	76.2	66.7	0.640
32	1-1/4	76.3	72.1	2.1	42.7	39.4	1.65	76.2	63.5	0.628
25	1	76.3	72.1	2.1	34.0	30.7	1.65	76.2	57.2	0.610
80 × 80	3 × 3	89.1	84.9	2.1	89.1	84.9	2.1	85.7	85.7	0.957
65	2-1/2	89.1	84.9	2.1	76.3	72.1	2.1	85.7	82.6	0.918
50	2	89.1	84.9	2.1	60.5	57.2	1.65	85.7	76.2	0.848
40	1-1/2	89.1	84.9	2.1	48.6	45.3	1.65	85.7	73.0	0.826
32	1-1/4	89.1	84.9	2.1	42.7	39.4	1.65	85.7	69.9	0.814
90 × 90	3-1/2 × 3-1/2	101.6	97.4	2.1	101.6	97.4	2.1	95.3	95.3	1.21
80	3	101.6	97.4	2.1	89.1	84.9	2.1	95.3	92.1	1.16
65	2-1/2	101.6	97.4	2.1	76.3	72.1	2.1	95.3	88.9	1.12
50	2	101.6	97.4	2.1	60.5	57.2	1.65	95.3	82.6	1.05
40	1-1/2	101.6	97.4	2.1	48.6	45.3	1.65	95.3	79.4	1.04
100 × 100	4 × 4	114.3	110.1	2.1	114.3	110.1	2.1	104.8	104.8	1.49
90	3-1/2	114.3	110.1	2.1	101.6	97.4	2.1	104.8	101.6	1.44
80	3	114.3	110.1	2.1	89.1	84.9	2.1	104.8	98.4	1.40
65	2-1/2	114.3	110.1	2.1	76.3	72.1	2.1	104.8	95.3	1.36
50	2	114.3	110.1	2.1	60.5	57.2	1.65	104.8	88.9	1.29
40	1-1/2	114.3	110.1	2.1	48.6	45.3	1.65	104.8	85.7	1.27
125 × 125	5 × 5	139.8	134.2	2.8	139.8	134.2	2.8	123.8	123.8	2.85
100	4	139.8	134.2	2.8	114.3	110.1	2.1	123.8	117.5	2.62
90	3-1/2	139.8	134.2	2.8	101.6	97.4	2.1	123.8	114.3	2.57
80	3	139.8	134.2	2.8	89.1	84.9	2.1	123.8	111.1	2.53
65	2-1/2	139.8	134.2	2.8	76.3	72.1	2.1	123.8	108.0	2.49
50	2	139.8	134.2	2.8	60.5	57.2	1.65	123.8	104.8	2.42

径の呼び(母管側 × 枝管側)		大径側			小径側			中心から端面 までの距離		概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ	C	M	kg
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂			
150 × 150	6 × 6	165.2	159.6	2.8	165.2	159.6	2.8	142.9	142.9	3.88
125	5	165.2	159.6	2.8	139.8	134.2	2.8	142.9	136.5	3.71
100	4	165.2	159.6	2.8	114.3	110.1	2.1	142.9	130.2	3.48
90	3-1/2	165.2	159.6	2.8	101.6	97.4	2.1	142.9	127.0	3.43
80	3	165.2	159.6	2.8	89.1	84.9	2.1	142.9	123.8	3.39
65	2-1/2	165.2	159.6	2.8	76.3	72.1	2.1	142.9	120.7	3.35
200 × 200	8 × 8	216.3	210.7	2.8	216.3	210.7	2.8	177.8	177.8	6.27
150	6	216.3	210.7	2.8	165.2	159.6	2.8	177.8	168.3	5.91
125	5	216.3	210.7	2.8	139.8	134.2	2.8	177.8	161.9	5.75
100	4	216.3	210.7	2.8	114.3	110.1	2.1	177.8	155.6	5.52
90	3-1/2	216.3	210.7	2.8	101.6	97.4	2.1	177.8	152.4	5.47
250 × 250	10 × 10	267.4	260.6	3.4	267.4	260.6	3.4	215.9	215.9	11.4
200	8	267.4	260.6	3.4	216.3	210.7	2.8	215.9	203.2	10.6
150	6	267.4	260.6	3.4	165.2	159.6	2.8	215.9	193.7	10.2
125	5	267.4	260.6	3.4	139.8	134.2	2.8	215.9	190.5	10.1
100	4	267.4	260.6	3.4	114.3	110.1	2.1	215.9	184.2	9.85
300 × 300	12 × 12	318.5	310.5	4.0	318.5	310.5	4.0	254.0	254.0	18.7
250	10	318.5	310.5	4.0	267.4	260.6	3.4	254.0	241.3	17.6
200	8	318.5	310.5	4.0	216.3	210.7	2.8	254.0	228.6	16.8
150	6	318.5	310.5	4.0	165.2	159.6	2.8	254.0	219.1	16.4
125	5	318.5	310.5	4.0	139.8	134.2	2.8	254.0	215.9	16.3

1. 印はあらかじめ御相談下さい。

厚さ 5 S, 10 S, 20 S はステンレス鋼製管継手にのみ適用します。

T Sch 10 S寸法・重量表

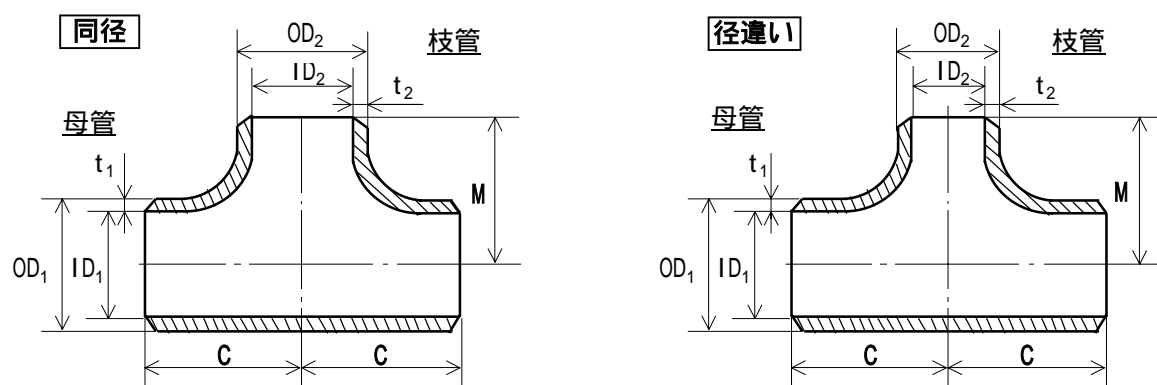

単位：mm


径の呼び(母管側 × 枝管側)		大径側			小径側			中心から端面までの距離		概略重量
(A)	(B)	外径 OD ₁	内径 ID ₁	厚さ t ₁	外径 OD ₂	内径 ID ₂	厚さ t ₂	C	M	kg
15 × 15	1/2 × 1/2	21.7	17.5	2.1	21.7	17.5	2.1	25.4	25.4	0.066
20 × 20	3/4 × 3/4	27.2	23.0	2.1	27.2	23.0	2.1	28.6	28.6	0.094
15	1/2	27.2	23.0	2.1	21.7	17.5	2.1	28.6	28.6	0.090
25 × 25	1 × 1	34.0	28.4	2.8	34.0	28.4	2.8	38.1	38.1	0.210
20	3/4	34.0	28.4	2.8	27.2	23.0	2.1	38.1	38.1	0.191
15	1/2	34.0	28.4	2.8	21.7	17.5	2.1	38.1	38.1	0.185
32 × 32	1-1/4 × 1-1/4	42.7	37.1	2.8	42.7	37.1	2.8	47.6	47.6	0.334
25	1	42.7	37.1	2.8	34.0	28.4	2.8	47.6	47.6	0.319
20	3/4	42.7	37.1	2.8	27.2	23.0	2.1	47.6	47.6	0.296
15	1/2	42.7	37.1	2.8	21.7	17.5	2.1	47.6	47.6	0.289
40 × 40	1-1/2 × 1-1/2	48.6	43.0	2.8	48.6	43.0	2.8	57.2	57.2	0.466
32	1-1/4	48.6	43.0	2.8	42.7	37.1	2.8	57.2	57.2	0.452
25	1	48.6	43.0	2.8	34.0	28.4	2.8	57.2	57.2	0.432
20	3/4	48.6	43.0	2.8	27.2	23.0	2.1	57.2	57.2	0.404
15	1/2	48.6	43.0	2.8	21.7	17.5	2.1	57.2	57.2	0.395
50 × 50	2 × 2	60.5	54.9	2.8	60.5	54.9	2.8	63.5	63.5	0.638
40	1-1/2	60.5	54.9	2.8	48.6	43.0	2.8	63.5	60.3	0.601
32	1-1/4	60.5	54.9	2.8	42.7	37.1	2.8	63.5	57.2	0.580
25	1	60.5	54.9	2.8	34.0	28.4	2.8	63.5	50.8	0.550
20	3/4	60.5	54.9	2.8	27.2	23.0	2.1	63.5	44.5	0.524
65 × 65	2-1/2 × 2-1/2	76.3	70.3	3.0	76.3	70.3	3.0	76.2	76.2	1.03
50	2	76.3	70.3	3.0	60.5	54.9	2.8	76.2	69.9	0.952
40	1-1/2	76.3	70.3	3.0	48.6	43.0	2.8	76.2	66.7	0.916
32	1-1/4	76.3	70.3	3.0	42.7	37.1	2.8	76.2	63.5	0.896
25	1	76.3	70.3	3.0	34.0	28.4	2.8	76.2	57.2	0.867
80 × 80	3 × 3	89.1	83.1	3.0	89.1	83.1	3.0	85.7	85.7	1.35
65	2-1/2	89.1	83.1	3.0	76.3	70.3	3.0	85.7	82.6	1.30
50	2	89.1	83.1	3.0	60.5	54.9	2.8	85.7	76.2	1.22
40	1-1/2	89.1	83.1	3.0	48.6	43.0	2.8	85.7	73.0	1.18
32	1-1/4	89.1	83.1	3.0	42.7	37.1	2.8	85.7	69.9	1.16
90 × 90	3-1/2 × 3-1/2	101.6	95.6	3.0	101.6	95.6	3.0	95.3	95.3	1.71
80	3	101.6	95.6	3.0	89.1	83.1	3.0	95.3	92.1	1.65
65	2-1/2	101.6	95.6	3.0	76.3	70.3	3.0	95.3	88.9	1.59
50	2	101.6	95.6	3.0	60.5	54.9	2.8	95.3	82.6	1.51
40	1-1/2	101.6	95.6	3.0	48.6	43.0	2.8	95.3	79.4	1.48
100 × 100	4 × 4	114.3	108.3	3.0	114.3	108.3	3.0	104.8	104.8	2.12
90	3-1/2	114.3	108.3	3.0	101.6	95.6	3.0	104.8	101.6	2.05
80	3	114.3	108.3	3.0	89.1	83.1	3.0	104.8	98.4	1.99
65	2-1/2	114.3	108.3	3.0	76.3	70.3	3.0	104.8	95.3	1.93
50	2	114.3	108.3	3.0	60.5	54.9	2.8	104.8	88.9	1.85
40	1-1/2	114.3	108.3	3.0	48.6	43.0	2.8	104.8	85.7	1.82
125 × 125	5 × 5	139.8	133.0	3.4	139.8	133.0	3.4	123.8	123.8	3.45
100	4	139.8	133.0	3.4	114.3	108.3	3.0	123.8	117.5	3.22
90	3-1/2	139.8	133.0	3.4	101.6	95.6	3.0	123.8	114.3	3.15
80	3	139.8	133.0	3.4	89.1	83.1	3.0	123.8	111.1	3.09
65	2-1/2	139.8	133.0	3.4	76.3	70.3	3.0	123.8	108.0	3.04
50	2	139.8	133.0	3.4	60.5	54.9	2.8	123.8	104.8	2.97

径の呼び(母管側 × 枝管側)		大径側			小径側			中心から端面 までの距離		概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ	C	M	kg
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂			
150 × 150	6 × 6	165.2	158.4	3.4	165.2	158.4	3.4	142.9	142.9	4.69
125	5	165.2	158.4	3.4	139.8	133.0	3.4	142.9	136.5	4.49
100	4	165.2	158.4	3.4	114.3	108.3	3.0	142.9	130.2	4.27
90	3-1/2	165.2	158.4	3.4	101.6	95.6	3.0	142.9	127.0	4.20
80	3	165.2	158.4	3.4	89.1	83.1	3.0	142.9	123.8	4.14
65	2-1/2	165.2	158.4	3.4	76.3	70.3	3.0	142.9	120.7	4.08
200 × 200	8 × 8	216.3	208.3	4.0	216.3	208.3	4.0	177.8	177.8	8.90
150	6	216.3	208.3	4.0	165.2	158.4	3.4	177.8	168.3	8.26
125	5	216.3	208.3	4.0	139.8	133.0	3.4	177.8	161.9	8.06
100	4	216.3	208.3	4.0	114.3	108.3	3.0	177.8	155.6	7.83
90	3-1/2	216.3	208.3	4.0	101.6	95.6	3.0	177.8	152.4	7.77
250 × 250	10 × 10	267.4	259.4	4.0	267.4	259.4	4.0	215.9	215.9	13.3
200	8	267.4	259.4	4.0	216.3	208.3	4.0	215.9	203.2	12.7
150	6	267.4	259.4	4.0	165.2	158.4	3.4	215.9	193.7	12.0
125	5	267.4	259.4	4.0	139.8	133.0	3.4	215.9	190.5	11.9
100	4	267.4	259.4	4.0	114.3	108.3	3.0	215.9	184.2	11.6
300 × 300	12 × 12	318.5	309.5	4.5	318.5	309.5	4.5	254.0	254.0	21.0
250	10	318.5	309.5	4.5	267.4	259.4	4.0	254.0	241.3	19.8
200	8	318.5	309.5	4.5	216.3	208.3	4.0	254.0	228.6	19.1
150	6	318.5	309.5	4.5	165.2	158.4	3.4	254.0	219.1	18.5
125	5	318.5	309.5	4.5	139.8	133.0	3.4	254.0	215.9	18.3

1. 印はあらかじめ御相談下さい。

厚さ5S, 10S, 20Sはステンレス鋼製管継手にのみ適用します。

T S c h 2 0 S 寸法・重量表

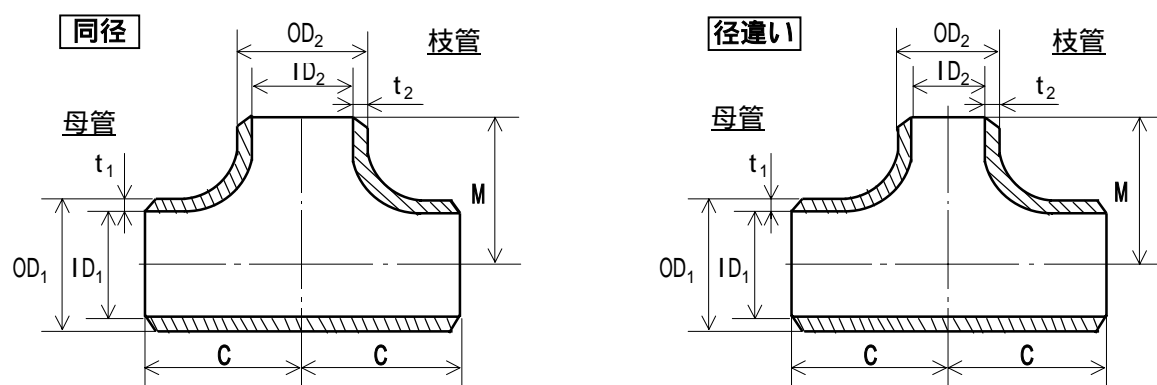

単位：mm


径の呼び(母管側 × 枝管側)		大径側			小径側			中心から端面までの距離		概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ	C	M	kg
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂			
15 × 15	1/2 × 1/2	21.7	16.7	2.5	21.7	16.7	2.5	25.4	25.4	0.077
20 × 20	3/4 × 3/4	27.2	22.2	2.5	27.2	22.2	2.5	28.6	28.6	0.110
15	1/2	27.2	22.2	2.5	21.7	16.7	2.5	28.6	28.6	0.105
25 × 25	1 × 1	34.0	28.0	3.0	34.0	28.0	3.0	38.1	38.1	0.223
20	3/4	34.0	28.0	3.0	27.2	22.2	2.5	38.1	38.1	0.207
15	1/2	34.0	28.0	3.0	21.7	16.7	2.5	38.1	38.1	0.200
32 × 32	1-1/4 × 1-1/4	42.7	36.7	3.0	42.7	36.7	3.0	47.6	47.6	0.357
25	1	42.7	36.7	3.0	34.0	28.0	3.0	47.6	47.6	0.340
20	3/4	42.7	36.7	3.0	27.2	22.2	2.5	47.6	47.6	0.319
15	1/2	42.7	36.7	3.0	21.7	16.7	2.5	47.6	47.6	0.311
40 × 40	1-1/2 × 1-1/2	48.6	42.6	3.0	48.6	42.6	3.0	57.2	57.2	0.497
32	1-1/4	48.6	42.6	3.0	42.7	36.7	3.0	57.2	57.2	0.482
25	1	48.6	42.6	3.0	34.0	28.0	3.0	57.2	57.2	0.461
20	3/4	48.6	42.6	3.0	27.2	22.2	2.5	57.2	57.2	0.436
15	1/2	48.6	42.6	3.0	21.7	16.7	2.5	57.2	57.2	0.425
50 × 50	2 × 2	60.5	53.5	3.5	60.5	53.5	3.5	63.5	63.5	0.788
40	1-1/2	60.5	53.5	3.5	48.6	42.6	3.0	63.5	60.3	0.726
32	1-1/4	60.5	53.5	3.5	42.7	36.7	3.0	63.5	57.2	0.704
25	1	60.5	53.5	3.5	34.0	28.0	3.0	63.5	50.8	0.672
20	3/4	60.5	53.5	3.5	27.2	22.2	2.5	63.5	44.5	0.646
65 × 65	2-1/2 × 2-1/2	76.3	69.3	3.5	76.3	69.3	3.5	76.2	76.2	1.20
50	2	76.3	69.3	3.5	60.5	53.5	3.5	76.2	69.9	1.11
40	1-1/2	76.3	69.3	3.5	48.6	42.6	3.0	76.2	66.7	1.05
32	1-1/4	76.3	69.3	3.5	42.7	36.7	3.0	76.2	63.5	1.03
25	1	76.3	69.3	3.5	34.0	28.0	3.0	76.2	57.2	1.00
80 × 80	3 × 3	89.1	81.1	4.0	89.1	81.1	4.0	85.7	85.7	1.78
65	2-1/2	89.1	81.1	4.0	76.3	69.3	3.5	85.7	82.6	1.68
50	2	89.1	81.1	4.0	60.5	53.5	3.5	85.7	76.2	1.59
40	1-1/2	89.1	81.1	4.0	48.6	42.6	3.0	85.7	73.0	1.53
32	1-1/4	89.1	81.1	4.0	42.7	36.7	3.0	85.7	69.9	1.51
90 × 90	3-1/2 × 3-1/2	101.6	93.6	4.0	101.6	93.6	4.0	95.3	95.3	2.26
80	3	101.6	93.6	4.0	89.1	81.1	4.0	95.3	92.1	2.18
65	2-1/2	101.6	93.6	4.0	76.3	69.3	3.5	95.3	88.9	2.07
50	2	101.6	93.6	4.0	60.5	53.5	3.5	95.3	82.6	1.99
40	1-1/2	101.6	93.6	4.0	48.6	42.6	3.0	95.3	79.4	1.93
100 × 100	4 × 4	114.3	106.3	4.0	114.3	106.3	4.0	104.8	104.8	2.80
90	3-1/2	114.3	106.3	4.0	101.6	93.6	4.0	104.8	101.6	2.71
80	3	114.3	106.3	4.0	89.1	81.1	4.0	104.8	98.4	2.63
65	2-1/2	114.3	106.3	4.0	76.3	69.3	3.5	104.8	95.3	2.52
50	2	114.3	106.3	4.0	60.5	53.5	3.5	104.8	88.9	2.44
40	1-1/2	114.3	106.3	4.0	48.6	42.6	3.0	104.8	85.7	2.38
125 × 125	5 × 5	139.8	129.8	5.0	139.8	129.8	5.0	123.8	123.8	5.01
100	4	139.8	129.8	5.0	114.3	106.3	4.0	123.8	117.5	4.63
90	3-1/2	139.8	129.8	5.0	101.6	93.6	4.0	123.8	114.3	4.54
80	3	139.8	129.8	5.0	89.1	81.1	4.0	123.8	111.1	4.46
65	2-1/2	139.8	129.8	5.0	76.3	69.3	3.5	123.8	108.0	4.35
50	2	139.8	129.8	5.0	60.5	53.5	3.5	123.8	104.8	4.29

径の呼び(母管側 × 枝管側)		大径側			小径側			中心から端面 までの距離		概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ	C	M	kg
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂			
150 × 150	6 × 6	165.2	155.2	5.0	165.2	155.2	5.0	142.9	142.9	6.83
125	5	165.2	155.2	5.0	139.8	129.8	5.0	142.9	136.5	6.54
100	4	165.2	155.2	5.0	114.3	106.3	4.0	142.9	130.2	6.16
90	3-1/2	165.2	155.2	5.0	101.6	93.6	4.0	142.9	127.0	6.07
80	3	165.2	155.2	5.0	89.1	81.1	4.0	142.9	123.8	5.99
65	2-1/2	165.2	155.2	5.0	76.3	69.3	3.5	142.9	120.7	5.88
200 × 200	8 × 8	216.3	203.3	6.5	216.3	203.3	6.5	177.8	177.8	14.3
150	6	216.3	203.3	6.5	165.2	155.2	5.0	177.8	168.3	13.1
125	5	216.3	203.3	6.5	139.8	129.8	5.0	177.8	161.9	12.8
100	4	216.3	203.3	6.5	114.3	106.3	4.0	177.8	155.6	12.5
90	3-1/2	216.3	203.3	6.5	101.6	93.6	4.0	177.8	152.4	12.4
250 × 250	10 × 10	267.4	254.4	6.5	267.4	254.4	6.5	215.9	215.9	21.5
200	8	267.4	254.4	6.5	216.3	203.3	6.5	215.9	203.2	20.4
150	6	267.4	254.4	6.5	165.2	155.2	5.0	215.9	193.7	19.2
125	5	267.4	254.4	6.5	139.8	129.8	5.0	215.9	190.5	19.0
100	4	267.4	254.4	6.5	114.3	106.3	4.0	215.9	184.2	18.6
300 × 300	12 × 12	318.5	305.5	6.5	318.5	305.5	6.5	254.0	254.0	30.1
250	10	318.5	305.5	6.5	267.4	254.4	6.5	254.0	241.3	28.8
200	8	318.5	305.5	6.5	216.3	203.3	6.5	254.0	228.6	27.7
150	6	318.5	305.5	6.5	165.2	155.2	5.0	254.0	219.1	26.6
125	5	318.5	305.5	6.5	139.8	129.8	5.0	254.0	215.9	26.3

1. 印はあらかじめ御相談下さい。

厚さ5S, 10S, 20Sはステンレス鋼製管継手にのみ適用します。

T Sch 40寸法・重量表

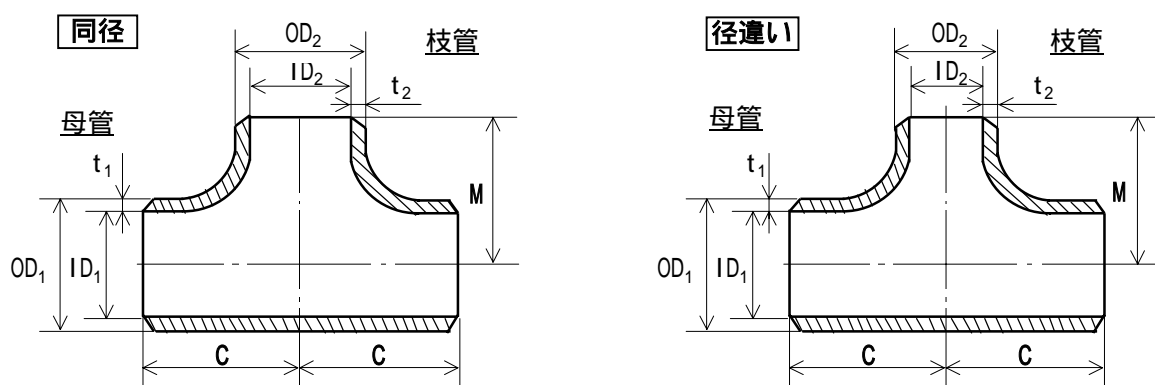


単位：mm

径の呼び(母管側 × 枝管側)		大径側			小径側			中心から端面までの距離		概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ	C	M	kg
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂			
15 × 15	1/2 × 1/2	21.7	16.1	2.8	21.7	16.1	2.8	25.4	25.4	0.085
20 × 20	3/4 × 3/4	27.2	21.4	2.9	27.2	21.4	2.9	28.6	28.6	0.125
15	1/2	27.2	21.4	2.9	21.7	16.1	2.8	28.6	28.6	0.119
25 × 25	1 × 1	34.0	27.2	3.4	34.0	27.2	3.4	38.1	38.1	0.250
20	3/4	34.0	27.2	3.4	27.2	21.4	2.9	38.1	38.1	0.232
15	1/2	34.0	27.2	3.4	21.7	16.1	2.8	38.1	38.1	0.223
32 × 32	1-1/4 × 1-1/4	42.7	35.5	3.6	42.7	35.5	3.6	47.6	47.6	0.421
25	1	42.7	35.5	3.6	34.0	27.2	3.4	47.6	47.6	0.398
20	3/4	42.7	35.5	3.6	27.2	21.4	2.9	47.6	47.6	0.376
15	1/2	42.7	35.5	3.6	21.7	16.1	2.8	47.6	47.6	0.365
40 × 40	1-1/2 × 1-1/2	48.6	41.2	3.7	48.6	41.2	3.7	57.2	57.2	0.603
32	1-1/4	48.6	41.2	3.7	42.7	35.5	3.6	57.2	57.2	0.583
25	1	48.6	41.2	3.7	34.0	27.2	3.4	57.2	57.2	0.553
20	3/4	48.6	41.2	3.7	27.2	21.4	2.9	57.2	57.2	0.526
15	1/2	48.6	41.2	3.7	21.7	16.1	2.8	57.2	57.2	0.511
50 × 50	2 × 2	60.5	52.7	3.9	60.5	52.7	3.9	63.5	63.5	0.872
40	1-1/2	60.5	52.7	3.9	48.6	41.2	3.7	63.5	60.3	0.814
32	1-1/4	60.5	52.7	3.9	42.7	35.5	3.6	63.5	57.2	0.785
25	1	60.5	52.7	3.9	34.0	27.2	3.4	63.5	50.8	0.744
20	3/4	60.5	52.7	3.9	27.2	21.4	2.9	63.5	44.5	0.716
15	1/2	60.5	52.7	3.9	21.7	16.1	2.8	63.5	44.5	0.710
65 × 65	2-1/2 × 2-1/2	76.3	65.9	5.2	76.3	65.9	5.2	76.2	76.2	1.74
50	2	76.3	65.9	5.2	60.5	52.7	3.9	76.2	69.9	1.56
40	1-1/2	76.3	65.9	5.2	48.6	41.2	3.7	76.2	66.7	1.51
32	1-1/4	76.3	65.9	5.2	42.7	35.5	3.6	76.2	63.5	1.48
25	1	76.3	65.9	5.2	34.0	27.2	3.4	76.2	57.2	1.44
80 × 80	3 × 3	89.1	78.1	5.5	89.1	78.1	5.5	85.7	85.7	2.41
65	2-1/2	89.1	78.1	5.5	76.3	65.9	5.2	85.7	82.6	2.29
50	2	89.1	78.1	5.5	60.5	52.7	3.9	85.7	76.2	2.11
40	1-1/2	89.1	78.1	5.5	48.6	41.2	3.7	85.7	73.0	2.06
32	1-1/4	89.1	78.1	5.5	42.7	35.5	3.6	85.7	69.9	2.03
25	1	89.1	78.1	5.5	34.0	27.2	3.4	85.7	69.9	2.01
90 × 90	3-1/2 × 3-1/2	101.6	90.2	5.7	101.6	90.2	5.7	95.3	95.3	3.17
80	3	101.6	90.2	5.7	89.1	78.1	5.5	95.3	92.1	3.04
65	2-1/2	101.6	90.2	5.7	76.3	65.9	5.2	95.3	88.9	2.92
50	2	101.6	90.2	5.7	60.5	52.7	3.9	95.3	82.6	2.74
100 × 100	4 × 4	114.3	102.3	6.0	114.3	102.3	6.0	104.8	104.8	4.12
90	3-1/2	114.3	102.3	6.0	101.6	90.2	5.7	104.8	101.6	3.96
80	3	114.3	102.3	6.0	89.1	78.1	5.5	104.8	98.4	3.82
65	2-1/2	114.3	102.3	6.0	76.3	65.9	5.2	104.8	95.3	3.70
50	2	114.3	102.3	6.0	60.5	52.7	3.9	104.8	88.9	3.53
40	1-1/2	114.3	102.3	6.0	48.6	41.2	3.7	104.8	85.7	3.47
32	1-1/4	114.3	102.3	6.0	42.7	35.5	3.6	104.8	85.7	3.46
25	1	114.3	102.3	6.0	34.0	27.2	3.4	104.8	85.7	3.43

径の呼び(母管側×枝管側)		大径側			小径側			中心から端面までの距離		概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ	C	M	kg
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂			
125×125	5×5	139.8	126.6	6.6	139.8	126.6	6.6	123.8	123.8	6.53
100	4	139.8	126.6	6.6	114.3	102.3	6.0	123.8	117.5	6.13
90	3-1/2	139.8	126.6	6.6	101.6	90.2	5.7	123.8	114.3	5.96
80	3	139.8	126.6	6.6	89.1	78.1	5.5	123.8	111.1	5.83
65	2-1/2	139.8	126.6	6.6	76.3	65.9	5.2	123.8	108.0	5.71
50	2	139.8	126.6	6.6	60.5	52.7	3.9	123.8	104.8	5.56
40	1-1/2	139.8	126.6	6.6	48.6	41.2	3.7	123.8	104.8	5.51
150×150	6×6	165.2	151.0	7.1	165.2	151.0	7.1	142.9	142.9	9.58
125	5	165.2	151.0	7.1	139.8	126.6	6.6	142.9	136.5	9.08
100	4	165.2	151.0	7.1	114.3	102.3	6.0	142.9	130.2	8.67
90	3-1/2	165.2	151.0	7.1	101.6	90.2	5.7	142.9	127.0	8.51
80	3	165.2	151.0	7.1	89.1	78.1	5.5	142.9	123.8	8.37
65	2-1/2	165.2	151.0	7.1	76.3	65.9	5.2	142.9	120.7	8.25
50	2	165.2	151.0	7.1	60.5	52.7	3.9	142.9	120.7	8.12
200×200	8×8	216.3	199.9	8.2	216.3	199.9	8.2	177.8	177.8	17.9
150	6	216.3	199.9	8.2	165.2	151.0	7.1	177.8	168.3	16.6
125	5	216.3	199.9	8.2	139.8	126.6	6.6	177.8	161.9	16.1
100	4	216.3	199.9	8.2	114.3	102.3	6.0	177.8	155.6	15.7
80	3	216.3	199.9	8.2	89.1	78.1	5.5	177.8	152.4	15.5
250×250	10×10	267.4	248.8	9.3	267.4	248.8	9.3	215.9	215.9	30.4
200	8	267.4	248.8	9.3	216.3	199.9	8.2	215.9	203.2	28.5
150	6	267.4	248.8	9.3	165.2	151.0	7.1	215.9	193.7	27.2
125	5	267.4	248.8	9.3	139.8	126.6	6.6	215.9	190.5	26.8
100	4	267.4	248.8	9.3	114.3	102.3	6.0	215.9	184.2	26.4
300×300	12×12	318.5	297.9	10.3	318.5	297.9	10.3	254.0	254.0	47.2
250	10	318.5	297.9	10.3	267.4	248.8	9.3	254.0	241.3	44.6
200	8	318.5	297.9	10.3	216.3	199.9	8.2	254.0	228.6	42.7
150	6	318.5	297.9	10.3	165.2	151.0	7.1	254.0	219.1	41.4
125	5	318.5	297.9	10.3	139.8	126.6	6.6	254.0	215.9	41.0
350×350	14×14	355.6	333.4	11.1	355.6	333.4	11.1	279.4	279.4	62.2
300	12	355.6	333.4	11.1	318.5	297.9	10.3	279.4	269.9	59.9
250	10	355.6	333.4	11.1	267.4	248.8	9.3	279.4	257.2	57.4
200	8	355.6	333.4	11.1	216.3	199.9	8.2	279.4	247.7	55.6
150	6	355.6	333.4	11.1	165.2	151.0	7.1	279.4	238.1	54.3
400×400	16×16	406.4	381.0	12.7	406.4	381.0	12.7	304.8	304.8	84.7
350	14	406.4	381.0	12.7	355.6	333.4	11.1	304.8	304.8	84.7
300	12	406.4	381.0	12.7	318.5	297.9	10.3	304.8	295.3	82.3
250	10	406.4	381.0	12.7	267.4	248.8	9.3	304.8	282.6	79.8
200	8	406.4	381.0	12.7	216.3	199.9	8.2	304.8	273.1	78.1
150	6	406.4	381.0	12.7	165.2	151.0	7.1	304.8	263.5	76.8
450×450	18×18	457.2	428.6	14.3	457.2	428.6	14.3	342.9	342.9	125.0
400	16	457.2	428.6	14.3	406.4	381.0	12.7	342.9	330.2	120.0
350	14	457.2	428.6	14.3	355.6	333.4	11.1	342.9	330.2	117.0
300	12	457.2	428.6	14.3	318.5	297.9	10.3	342.9	320.7	114.0
250	10	457.2	428.6	14.3	267.4	248.8	9.3	342.9	308.0	112.0
200	8	457.2	428.6	14.3	216.3	199.9	8.2	342.9	298.5	110.0
500×500	20×20	508.0	477.8	15.1	508.0	477.8	15.1	381.0	381.0	163.0
450	18	508.0	477.8	15.1	457.2	428.6	14.3	381.0	368.3	158.0
400	16	508.0	477.8	15.1	406.4	381.0	12.7	381.0	355.6	152.0
350	14	508.0	477.8	15.1	355.6	333.4	11.1	381.0	355.6	149.0
300	12	508.0	477.8	15.1	318.5	297.9	10.3	381.0	346.1	147.0
250	10	508.0	477.8	15.1	267.4	248.8	9.3	381.0	333.4	145.0
200	8	508.0	477.8	15.1	216.3	199.9	8.2	381.0	323.9	143.0

1. 印は日本工業規格(J I S)に含まれておりません。

T Sch 80寸法・重量表

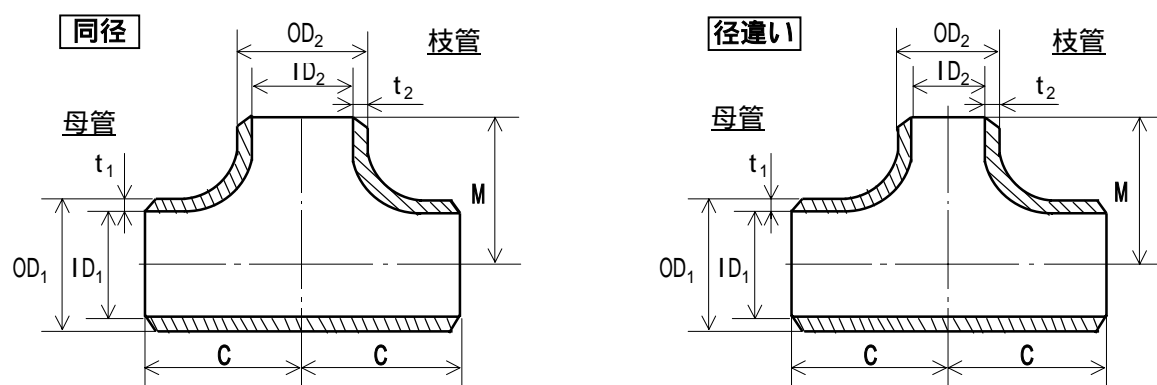


単位：mm

径の呼び(母管側×枝管側)		大径側			小径側			中心から端面までの距離		概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ	C	M	kg
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂			
15 × 15	1/2 × 1/2	21.7	14.3	3.7	21.7	14.3	3.7	25.4	25.4	0.107
20 × 20	3/4 × 3/4	27.2	19.4	3.9	27.2	19.4	3.9	28.6	28.6	0.162
15	1/2	27.2	19.4	3.9	21.7	14.3	3.7	28.6	28.6	0.153
25 × 25	1 × 1	34.0	25.0	4.5	34.0	25.0	4.5	38.1	38.1	0.318
20	3/4	34.0	25.0	4.5	27.2	19.4	3.9	38.1	38.1	0.297
15	1/2	34.0	25.0	4.5	21.7	14.3	3.7	38.1	38.1	0.284
32 × 32	1-1/4 × 1-1/4	42.7	32.9	4.9	42.7	32.9	4.9	47.6	47.6	0.554
25	1	42.7	32.9	4.9	34.0	25.0	4.5	47.6	47.6	0.521
20	3/4	42.7	32.9	4.9	27.2	19.4	3.9	47.6	47.6	0.493
15	1/2	42.7	32.9	4.9	21.7	14.3	3.7	47.6	47.6	0.478
40 × 40	1-1/2 × 1-1/2	48.6	38.4	5.1	48.6	38.4	5.1	57.2	57.2	0.805
32	1-1/4	48.6	38.4	5.1	42.7	32.9	4.9	57.2	57.2	0.776
25	1	48.6	38.4	5.1	34.0	25.0	4.5	57.2	57.2	0.773
20	3/4	48.6	38.4	5.1	27.2	19.4	3.9	57.2	57.2	0.699
15	1/2	48.6	38.4	5.1	21.7	14.3	3.7	57.2	57.2	0.680
50 × 50	2 × 2	60.5	49.5	5.5	60.5	49.5	5.5	63.5	63.5	1.19
40	1-1/2	60.5	49.5	5.5	48.6	38.4	5.1	63.5	60.3	1.11
32	1-1/4	60.5	49.5	5.5	42.7	32.9	4.9	63.5	57.2	1.07
25	1	60.5	49.5	5.5	34.0	25.0	4.5	63.5	50.8	1.01
20	3/4	60.5	49.5	5.5	27.2	19.4	3.9	63.5	44.5	0.979
15	1/2	60.5	49.5	5.5	21.7	14.3	3.7	63.5	44.5	0.970
65 × 65	2-1/2 × 2-1/2	76.3	62.3	7.0	76.3	62.3	7.0	76.2	76.2	2.28
50	2	76.3	62.3	7.0	60.5	49.5	5.5	76.2	69.9	2.06
40	1-1/2	76.3	62.3	7.0	48.6	38.4	5.1	76.2	66.7	1.98
32	1-1/4	76.3	62.3	7.0	42.7	32.9	4.9	76.2	63.5	1.94
25	1	76.3	62.3	7.0	34.0	25.0	4.5	76.2	57.2	1.88
80 × 80	3 × 3	89.1	73.9	7.6	89.1	73.9	7.6	85.7	85.7	3.25
65	2-1/2	89.1	73.9	7.6	76.3	62.3	7.0	85.7	82.6	3.07
50	2	89.1	73.9	7.6	60.5	49.5	5.5	85.7	76.2	2.85
40	1-1/2	89.1	73.9	7.6	48.6	38.4	5.1	85.7	73.0	2.77
32	1-1/4	89.1	73.9	7.6	42.7	32.9	4.9	85.7	69.9	2.73
25	1	89.1	73.9	7.6	34.0	25.0	4.5	85.7	69.9	2.70
90 × 90	3-1/2 × 3-1/2	101.6	85.4	8.1	101.6	85.4	8.1	95.3	95.3	4.39
80	3	101.6	85.4	8.1	89.1	73.9	7.6	95.3	92.1	4.19
65	2-1/2	101.6	85.4	8.1	76.3	62.3	7.0	95.3	88.9	4.01
50	2	101.6	85.4	8.1	60.5	49.5	5.5	95.3	82.6	3.80
100 × 100	4 × 4	114.3	97.1	8.6	114.3	97.1	8.6	104.8	104.8	5.76
90	3-1/2	114.3	97.1	8.6	101.6	85.4	8.1	104.8	101.6	5.53
80	3	114.3	97.1	8.6	89.1	73.9	7.6	104.8	98.4	5.33
65	2-1/2	114.3	97.1	8.6	76.3	62.3	7.0	104.8	95.3	5.15
50	2	114.3	97.1	8.6	60.5	49.5	5.5	104.8	88.9	4.93
40	1-1/2	114.3	97.1	8.6	48.6	38.4	5.1	104.8	85.7	4.85
32	1-1/4	114.3	97.1	8.6	42.7	32.9	4.9	104.8	85.7	4.83
25	1	114.3	97.1	8.6	34.0	25.0	4.5	104.8	85.7	4.79

径の呼び(母管側 × 枝管側)		大径側			小径側			中心から端面 までの距離		概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ	C	M	kg
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂			
125 × 125	5 × 5	139.8	120.8	9.5	139.8	120.8	9.5	123.8	123.8	9.20
100	4	139.8	120.8	9.5	114.3	97.1	8.6	123.8	117.5	8.62
90	3-1/2	139.8	120.8	9.5	101.6	85.4	8.1	123.8	114.3	8.38
80	3	139.8	120.8	9.5	89.1	73.9	7.6	123.8	111.1	8.18
65	2-1/2	139.8	120.8	9.5	76.3	62.3	7.0	123.8	108.0	8.01
50	2	139.8	120.8	9.5	60.5	49.5	5.5	123.8	104.8	7.81
40	1-1/2	139.8	120.8	9.5	48.6	38.4	5.1	123.8	104.8	7.75
150 × 150	6 × 6	165.2	143.2	11.0	165.2	143.2	11.0	142.9	142.9	14.5
125	5	165.2	143.2	11.0	139.8	120.8	9.5	142.9	136.5	13.6
100	4	165.2	143.2	11.0	114.3	97.1	8.6	142.9	130.2	13.0
90	3-1/2	165.2	143.2	11.0	101.6	85.4	8.1	142.9	127.0	12.8
80	3	165.2	143.2	11.0	89.1	73.9	7.6	142.9	123.8	12.6
65	2-1/2	165.2	143.2	11.0	76.3	62.3	7.0	142.9	120.7	12.4
50	2	165.2	143.2	11.0	60.5	49.5	5.5	142.9	120.7	12.2
200 × 200	8 × 8	216.3	190.9	12.7	216.3	190.9	12.7	177.8	177.8	27.1
150	6	216.3	190.9	12.7	165.2	143.2	11.0	177.8	168.3	25.2
125	5	216.3	190.9	12.7	139.8	120.8	9.5	177.8	161.9	24.3
100	4	216.3	190.9	12.7	114.3	97.1	8.6	177.8	155.6	23.7
80	3	216.3	190.9	12.7	89.1	73.9	7.6	177.8	152.4	23.3
250 × 250	10 × 10	267.4	237.2	15.1	267.4	237.2	15.1	215.9	215.9	48.3
200	8	267.4	237.2	15.1	216.3	190.9	12.7	215.9	203.2	45.0
150	6	267.4	237.2	15.1	165.2	143.2	11.0	215.9	193.7	43.1
125	5	267.4	237.2	15.1	139.8	120.8	9.5	215.9	190.5	42.3
100	4	267.4	237.2	15.1	114.3	97.1	8.6	215.9	184.2	41.7
300 × 300	12 × 12	318.5	283.7	17.4	318.5	283.7	17.4	254.0	254.0	77.8
250	10	318.5	283.7	17.4	267.4	237.2	15.1	254.0	241.3	73.3
200	8	318.5	283.7	17.4	216.3	190.9	12.7	254.0	228.6	70.0
150	6	318.5	283.7	17.4	165.2	143.2	11.0	254.0	219.1	68.1
125	5	318.5	283.7	17.4	139.8	120.8	9.5	254.0	215.9	67.3
350 × 350	14 × 14	355.6	317.6	19.0	355.6	317.6	19.0	279.4	279.4	104.0
300	12	355.6	317.6	19.0	318.5	283.7	17.4	279.4	269.9	100.0
250	10	355.6	317.6	19.0	267.4	237.2	15.1	279.4	257.2	95.5
200	8	355.6	317.6	19.0	216.3	190.9	12.7	279.4	247.7	92.5
150	6	355.6	317.6	19.0	165.2	143.2	11.0	279.4	238.1	90.6

1 . 印は日本工業規格(J I S)に含まれておりません。

T Sch 160寸法・重量表

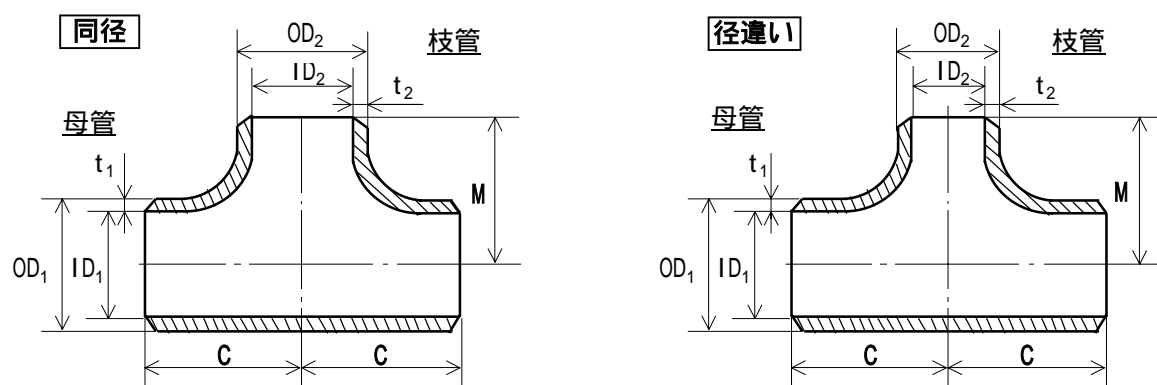


単位：mm

径の呼び(母管側 × 枝管側)		大径側			小径側			中心から端面までの距離		概略重量
		外径	内径	厚さ	外径	内径	厚さ	C	M	
(A)	(B)	OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂			kg
15 × 15	1/2 × 1/2	21.7	12.3	4.7	21.7	12.3	4.7	25.4	25.4	0.129
20 × 20	3/4 × 3/4	27.2	16.2	5.5	27.2	16.2	5.5	28.6	28.6	0.212
15	1/2	27.2	16.2	5.5	21.7	12.3	4.7	28.6	28.6	0.197
25 × 25	1 × 1	34.0	21.2	6.4	34.0	21.2	6.4	38.1	38.1	0.424
20	3/4	34.0	21.2	6.4	27.2	16.2	5.5	38.1	38.1	0.394
15	1/2	34.0	21.2	6.4	21.7	12.3	4.7	38.1	38.1	0.372
32 × 32	1-1/4 × 1-1/4	42.7	29.9	6.4	42.7	29.9	6.4	47.6	47.6	0.695
25	1	42.7	29.9	6.4	34.0	21.2	6.4	47.6	47.6	0.659
20	3/4	42.7	29.9	6.4	27.2	16.2	5.5	47.6	47.6	0.622
15	1/2	42.7	29.9	6.4	21.7	12.3	4.7	47.6	47.6	0.597
40 × 40	1-1/2 × 1-1/2	48.6	34.4	7.1	48.6	34.4	7.1	57.2	57.2	1.07
32	1-1/4	48.6	34.4	7.1	42.7	29.9	6.4	57.2	57.2	1.04
25	1	48.6	34.4	7.1	34.0	21.2	6.4	57.2	57.2	1.01
20	3/4	48.6	34.4	7.1	27.2	16.2	5.5	57.2	57.2	0.928
15	1/2	48.6	34.4	7.1	21.7	12.3	4.7	57.2	57.2	0.896
50 × 50	2 × 2	60.5	43.1	8.7	60.5	43.1	8.7	63.5	63.5	1.78
40	1-1/2	60.5	43.1	8.7	48.6	34.4	7.1	63.5	60.3	1.63
32	1-1/4	60.5	43.1	8.7	42.7	29.9	6.4	63.5	57.2	1.57
25	1	60.5	43.1	8.7	34.0	21.2	6.4	63.5	50.8	1.50
20	3/4	60.5	43.1	8.7	27.2	16.2	5.5	63.5	44.5	1.45
15	1/2	60.5	43.1	8.7	21.7	12.3	4.7	63.5	44.5	1.44
65 × 65	2-1/2 × 2-1/2	76.3	57.3	9.5	76.3	57.3	9.5	76.2	76.2	2.98
50	2	76.3	57.3	9.5	60.5	43.1	8.7	76.2	69.9	2.74
40	1-1/2	76.3	57.3	9.5	48.6	34.4	7.1	76.2	66.7	2.59
32	1-1/4	76.3	57.3	9.5	42.7	29.9	6.4	76.2	63.5	2.53
25	1	76.3	57.3	9.5	34.0	21.2	6.4	76.2	57.2	2.46
80 × 80	3 × 3	89.1	66.9	11.1	89.1	66.9	11.1	85.7	85.7	4.54
65	2-1/2	89.1	66.9	11.1	76.3	57.3	9.5	85.7	82.6	4.25
50	2	89.1	66.9	11.1	60.5	43.1	8.7	85.7	76.2	4.01
40	1-1/2	89.1	66.9	11.1	48.6	34.4	7.1	85.7	73.0	3.86
32	1-1/4	89.1	66.9	11.1	42.7	29.9	6.4	85.7	69.9	3.80
25	1	89.1	66.9	11.1	34.0	21.2	6.4	85.7	69.9	3.77
90 × 90	3-1/2 × 3-1/2	101.6	76.2	12.7	101.6	76.2	12.7	95.3	95.3	6.54
80	3	101.6	76.2	12.7	89.1	66.9	11.1	95.3	92.1	6.19
65	2-1/2	101.6	76.2	12.7	76.3	57.3	9.5	95.3	88.9	5.90
50	2	101.6	76.2	12.7	60.5	43.1	8.7	95.3	82.6	5.66
100 × 100	4 × 4	114.3	87.3	13.5	114.3	87.3	13.5	104.8	104.8	8.63
90	3-1/2	114.3	87.3	13.5	101.6	76.2	12.7	104.8	101.6	8.27
80	3	114.3	87.3	13.5	89.1	66.9	11.1	104.8	98.4	7.91
65	2-1/2	114.3	87.3	13.5	76.3	57.3	9.5	104.8	95.3	7.63
50	2	114.3	87.3	13.5	60.5	43.1	8.7	104.8	88.9	7.38
40	1-1/2	114.3	87.3	13.5	48.6	34.4	7.1	104.8	85.7	7.24
32	1-1/4	114.3	87.3	13.5	42.7	29.9	6.4	104.8	85.7	7.19
25	1	114.3	87.3	13.5	34.0	21.2	6.4	104.8	85.7	7.15

径の呼び(母管側 × 枝管側)		大径側			小径側			中心から端面までの距離		概略重量
(A)	(B)	外径 OD ₁	内径 ID ₁	厚さ t ₁	外径 OD ₂	内径 ID ₂	厚さ t ₂	C	M	kg
125 × 125	5 × 5	139.8	108.0	15.9	139.8	108.0	15.9	123.8	123.8	14.6
100	4	139.8	108.0	15.9	114.3	87.3	13.5	123.8	117.5	13.6
90	3-1/2	139.8	108.0	15.9	101.6	76.2	12.7	123.8	114.3	13.3
80	3	139.8	108.0	15.9	89.1	66.9	11.1	123.8	111.1	12.9
65	2-1/2	139.8	108.0	15.9	76.3	57.3	9.5	123.8	108.0	12.6
50	2	139.8	108.0	15.9	60.5	43.1	8.7	123.8	104.8	12.4
40	1-1/2	139.8	108.0	15.9	48.6	34.4	7.1	123.8	104.8	12.3
150 × 150	6 × 6	165.2	128.8	18.2	165.2	128.8	18.2	142.9	142.9	22.8
125	5	165.2	128.8	18.2	139.8	108.0	15.9	142.9	136.5	21.5
100	4	165.2	128.8	18.2	114.3	87.3	13.5	142.9	130.2	20.4
90	3-1/2	165.2	128.8	18.2	101.6	76.2	12.7	142.9	127.0	20.1
80	3	165.2	128.8	18.2	89.1	66.9	11.1	142.9	123.8	19.7
65	2-1/2	165.2	128.8	18.2	76.3	57.3	9.5	142.9	120.7	19.4
50	2	165.2	128.8	18.2	60.5	43.1	8.7	142.9	120.7	19.3
200 × 200	8 × 8	216.3	170.3	23.0	216.3	170.3	23.0	177.8	177.8	46.6
150	6	216.3	170.3	23.0	165.2	128.8	18.2	177.8	168.3	42.9
125	5	216.3	170.3	23.0	139.8	108.0	15.9	177.8	161.9	41.6
100	4	216.3	170.3	23.0	114.3	87.3	13.5	177.8	155.6	40.6
80	3	216.3	170.3	23.0	89.1	66.9	11.1	177.8	152.4	39.9
250 × 250	10 × 10	267.4	210.2	28.6	267.4	210.2	28.6	215.9	215.9	86.5
200	8	267.4	210.2	28.6	216.3	170.3	23.0	215.9	203.2	80.3
150	6	267.4	210.2	28.6	165.2	128.8	18.2	215.9	193.7	76.6
125	5	267.4	210.2	28.6	139.8	108.0	15.9	215.9	190.5	75.4
100	4	267.4	210.2	28.6	114.3	87.3	13.5	215.9	184.2	74.4
300 × 300	12 × 12	318.5	251.9	33.3	318.5	251.9	33.3	254.0	254.0	141.0
250	10	318.5	251.9	33.3	267.4	210.2	28.6	254.0	241.3	133.0
200	8	318.5	251.9	33.3	216.3	170.3	23.0	254.0	228.6	127.0
150	6	318.5	251.9	33.3	165.2	128.8	18.2	254.0	219.1	123.0
125	5	318.5	251.9	33.3	139.8	108.0	15.9	254.0	215.9	122.0
350 × 350	14 × 14	355.6	284.2	35.7	355.6	284.2	35.7	279.4	279.4	186.0
300	12	355.6	284.2	35.7	318.5	251.9	33.3	279.4	269.9	179.0
250	10	355.6	284.2	35.7	267.4	210.2	28.6	279.4	257.2	171.0
200	8	355.6	284.2	35.7	216.3	170.3	23.0	279.4	247.7	165.0
150	6	355.6	284.2	35.7	165.2	128.8	18.2	279.4	238.1	162.0

1. 印は日本工業規格(J I S)に含まれておりません。

鋼板製 T L G寸法・重量表

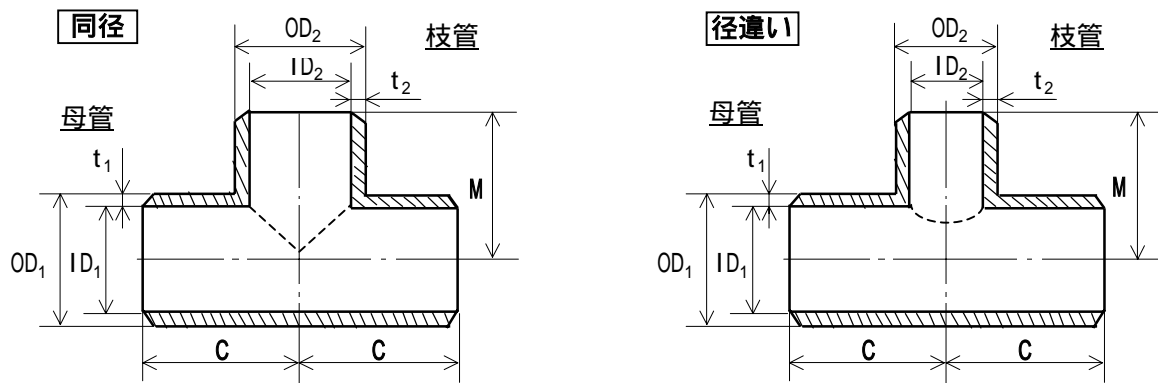


単位：mm

径の呼び(母管側 × 枝管側)		大径側			小径側			中心から端面までの距離		概略重量
(A)	(B)	外径 OD ₁	内径 ID ₁	厚さ t ₁	外径 OD ₂	内径 ID ₂	厚さ t ₂	C	M	kg
400 × 400	16 × 16	406.4	390.8	7.9	406.4	390.8	7.9	304.8	304.8	55.2
	350	406.4	390.8	7.9	355.6	340.0	7.9	304.8	304.8	54.2
	300	406.4	390.8	7.9	318.5	302.9	7.9	304.8	295.3	52.9
	250	406.4	390.8	7.9	267.4	251.8	7.9	304.8	282.6	51.3
450 × 450	18 × 18	457.2	441.6	7.9	457.2	441.6	7.9	342.9	342.9	70.0
	400	457.2	441.6	7.9	406.4	390.8	7.9	342.9	330.2	67.9
	350	457.2	441.6	7.9	355.6	340.0	7.9	342.9	330.2	66.9
	300	457.2	441.6	7.9	318.5	302.9	7.9	342.9	320.7	65.6
500 × 500	20 × 20	508.0	492.4	7.9	508.0	492.4	7.9	381.0	381.0	86.6
	450	508.0	492.4	7.9	457.2	441.6	7.9	381.0	368.3	84.2
	400	508.0	492.4	7.9	406.4	390.8	7.9	381.0	355.6	82.1
	350	508.0	492.4	7.9	355.6	340.0	7.9	381.0	355.6	81.1
550 × 550	22 × 22	558.8	543.2	7.9	558.8	543.2	7.9	419.1	419.1	105.0
	500	558.8	543.2	7.9	508.0	492.4	7.9	419.1	406.4	102.0
	450	558.8	543.2	7.9	457.2	441.6	7.9	419.1	393.7	99.9
	400	558.8	543.2	7.9	406.4	390.8	7.9	419.1	381.0	97.8
600 × 600	24 × 24	609.6	594.0	7.9	609.6	594.0	7.9	431.8	431.8	116.0
	550	609.6	594.0	7.9	558.8	543.2	7.9	431.8	431.8	115.0
	500	609.6	594.0	7.9	508.0	492.4	7.9	431.8	431.8	114.0
	450	609.6	594.0	7.9	457.2	441.6	7.9	431.8	419.1	111.0
650 × 650	26 × 26	660.4	644.8	7.9	660.4	644.8	7.9	495.3	495.3	147.0
	600	660.4	644.8	7.9	609.6	594.0	7.9	495.3	486.2	144.0
	550	660.4	644.8	7.9	558.8	543.2	7.9	495.3	469.9	141.0
	500	660.4	644.8	7.9	508.0	492.4	7.9	495.3	457.2	138.0
700 × 700	28 × 28	711.2	695.6	7.9	711.2	695.6	7.9	520.7	520.7	160.0
	650	711.2	695.6	7.9	660.4	644.8	7.9	520.7	520.7	157.0
	600	711.2	695.6	7.9	609.6	594.0	7.9	520.7	508.0	153.0
	550	711.2	695.6	7.9	558.8	543.2	7.9	520.7	495.3	151.0
750 × 750	30 × 30	762.0	746.4	7.9	762.0	746.4	7.9	558.8	558.8	190.0
	700	762.0	746.4	7.9	711.2	695.6	7.9	558.8	546.1	188.0
	650	762.0	746.4	7.9	660.4	644.8	7.9	558.8	546.1	185.0
	600	762.0	746.4	7.9	609.6	594.0	7.9	558.8	533.4	182.0
800 × 800	32 × 32	812.8	797.2	7.9	812.8	797.2	7.9	596.9	596.9	207.0
	750	812.8	797.2	7.9	762.0	746.4	7.9	596.9	584.2	203.0
	700	812.8	797.2	7.9	711.2	695.6	7.9	596.9	571.5	200.0
	650	812.8	797.2	7.9	660.4	644.8	7.9	596.9	571.5	198.0
850 × 850	34 × 34	863.6	848.0	7.9	863.6	848.0	7.9	635.0	635.0	245.0
	800	863.6	848.0	7.9	812.8	797.2	7.9	635.0	622.3	243.0
	750	863.6	848.0	7.9	762.0	746.4	7.9	635.0	609.6	238.0
	700	863.6	848.0	7.9	711.2	695.6	7.9	635.0	596.9	236.0
900 × 900	36 × 36	914.4	898.8	7.9	914.4	898.8	7.9	673.1	673.1	276.0
	850	914.4	898.8	7.9	863.6	848.0	7.9	673.1	660.4	271.0
	800	914.4	898.8	7.9	812.8	797.2	7.9	673.1	647.7	269.0
	750	914.4	898.8	7.9	762.0	746.4	7.9	673.1	635.0	264.0

径の呼び(母管側 × 枝管側)		大径側			小径側			中心から端面 までの距離		概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ	C	M	kg
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂			
950 × 950	38 × 38	965.2	949.6	7.9	965.2	949.6	7.9	711.2	711.2	308.0
900	36	965.2	949.6	7.9	914.4	898.8	7.9	711.2	711.2	306.0
850	34	965.2	949.6	7.9	863.6	848.0	7.9	711.2	698.5	301.0
800	32	965.2	949.6	7.9	812.8	797.2	7.9	711.2	685.8	297.0
1000 × 1000	40 × 40	1016.0	1000.4	7.9	1016.0	1000.4	7.9	749.3	749.3	342.0
950	38	1016.0	1000.4	7.9	965.2	949.6	7.9	749.3	749.3	339.0
900	36	1016.0	1000.4	7.9	914.4	898.8	7.9	749.3	736.6	335.0
850	34	1016.0	1000.4	7.9	863.6	848.0	7.9	749.3	723.9	330.0
1050 × 1050	42 × 42	1066.8	1051.2	7.9	1066.8	1051.2	7.9	762.0	711.2	351.0
1000	40	1066.8	1051.2	7.9	1016.0	1000.4	7.9	762.0	711.2	349.0
950	38	1066.8	1051.2	7.9	965.2	949.6	7.9	762.0	711.2	347.0
900	36	1066.8	1051.2	7.9	914.4	898.8	7.9	762.0	711.2	346.0
1100 × 1100	44 × 44	1117.6	1102.0	7.9	1117.6	1102.0	7.9	812.8	762.0	395.0
1050	42	1117.6	1102.0	7.9	1066.8	1051.2	7.9	812.8	762.0	393.0
1000	40	1117.6	1102.0	7.9	1016.0	1000.4	7.9	812.8	749.3	389.0
950	38	1117.6	1102.0	7.9	965.2	949.6	7.9	812.8	736.6	384.0
1150 × 1150	46 × 46	1168.4	1152.8	7.9	1168.4	1152.8	7.9	850.9	800.1	433.0
1100	44	1168.4	1152.8	7.9	1117.6	1102.0	7.9	850.9	800.1	431.0
1050	42	1168.4	1152.8	7.9	1066.8	1051.2	7.9	850.9	787.4	426.0
1000	40	1168.4	1152.8	7.9	1016.0	1000.4	7.9	850.9	774.7	422.0
1200 × 1200	48 × 48	1219.2	1203.6	7.9	1219.2	1203.6	7.9	889.0	838.2	473.0
1150	46	1219.2	1203.6	7.9	1168.4	1152.8	7.9	889.0	838.2	471.0
1100	44	1219.2	1203.6	7.9	1117.6	1102.0	7.9	889.0	838.2	469.0
1050	42	1219.2	1203.6	7.9	1066.8	1051.2	7.9	889.0	812.8	461.0

鋼板製 T STD寸法・重量表


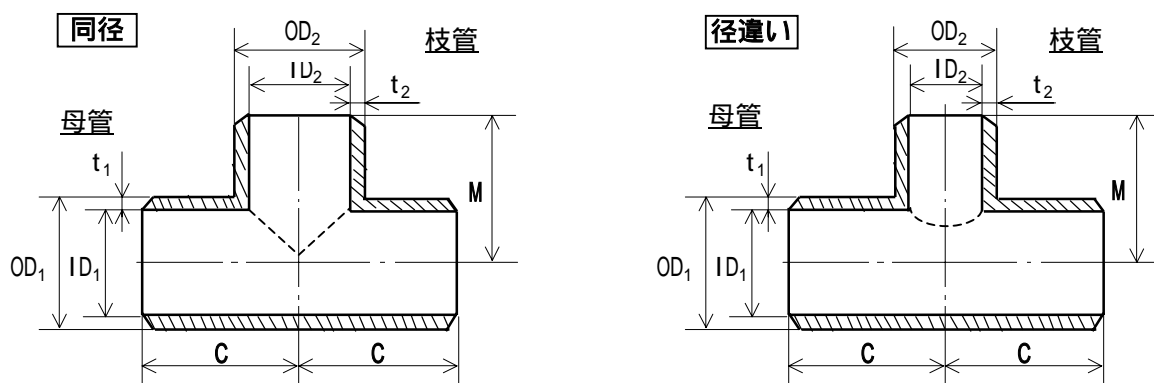


単位：mm

径の呼び(母管側×枝管側)		大径側			小径側			中心から端面までの距離		概略重量
(A)	(B)	外径 OD ₁	内径 ID ₁	厚さ t ₁	外径 OD ₂	内径 ID ₂	厚さ t ₂	C	M	kg
400×400	16×16	406.4	387.4	9.5	406.4	387.4	9.5	304.8	304.8	66.1
	350	406.4	387.4	9.5	355.6	336.6	9.5	304.8	304.8	64.9
	300	406.4	387.4	9.5	318.5	299.5	9.5	304.8	295.3	63.3
	250	406.4	387.4	9.5	267.4	248.4	9.5	304.8	282.6	61.5
450×450	18×18	457.2	438.2	9.5	457.2	438.2	9.5	342.9	342.9	83.9
	400	457.2	438.2	9.5	406.4	387.4	9.5	342.9	330.2	81.3
	350	457.2	438.2	9.5	355.6	336.6	9.5	342.9	330.2	80.1
	300	457.2	438.2	9.5	318.5	299.5	9.5	342.9	320.7	78.6
500×500	20×20	508.0	489.0	9.5	508.0	489.0	9.5	381.0	381.0	104.0
	450	508.0	489.0	9.5	457.2	438.2	9.5	381.0	368.3	101.0
	400	508.0	489.0	9.5	406.4	387.4	9.5	381.0	355.6	98.4
	350	508.0	489.0	9.5	355.6	336.6	9.5	381.0	355.6	97.2
550×550	22×22	558.8	539.8	9.5	558.8	539.8	9.5	419.1	419.1	126.0
	500	558.8	539.8	9.5	508.0	489.0	9.5	419.1	406.4	123.0
	450	558.8	539.8	9.5	457.2	438.2	9.5	419.1	393.7	120.0
	400	558.8	539.8	9.5	406.4	387.4	9.5	419.1	381.0	117.0
600×600	24×24	609.6	590.6	9.5	609.6	590.6	9.5	431.8	431.8	139.0
	550	609.6	590.6	9.5	558.8	539.8	9.5	431.8	431.8	138.0
	500	609.6	590.6	9.5	508.0	489.0	9.5	431.8	431.8	136.0
	450	609.6	590.6	9.5	457.2	438.2	9.5	431.8	419.1	133.0
650×650	26×26	660.4	641.4	9.5	660.4	641.4	9.5	495.3	495.3	176.0
	600	660.4	641.4	9.5	609.6	590.6	9.5	495.3	486.2	172.0
	550	660.4	641.4	9.5	558.8	539.8	9.5	495.3	469.9	169.0
	500	660.4	641.4	9.5	508.0	489.0	9.5	495.3	457.2	166.0
700×700	28×28	711.2	692.2	9.5	711.2	692.2	9.5	520.7	520.7	192.0
	650	711.2	692.2	9.5	660.4	641.4	9.5	520.7	520.7	188.0
	600	711.2	692.2	9.5	609.6	590.6	9.5	520.7	508.0	183.0
	550	711.2	692.2	9.5	558.8	539.8	9.5	520.7	495.3	182.0
750×750	30×30	762.0	743.0	9.5	762.0	743.0	9.5	558.8	558.8	238.0
	700	762.0	743.0	9.5	711.2	692.2	9.5	558.8	546.1	226.0
	650	762.0	743.0	9.5	660.4	641.4	9.5	558.8	546.1	222.0
	600	762.0	743.0	9.5	609.6	590.6	9.5	558.8	533.4	218.0
800×800	32×32	812.8	793.8	9.5	812.8	793.8	9.5	596.9	596.9	248.0
	750	812.8	793.8	9.5	762.0	743.0	9.5	596.9	584.2	243.0
	700	812.8	793.8	9.5	711.2	692.2	9.5	596.9	571.5	240.0
	650	812.8	793.8	9.5	660.4	641.4	9.5	596.9	571.5	238.0
850×850	34×34	863.6	844.6	9.5	863.6	844.6	9.5	635.0	635.0	295.0
	800	863.6	844.6	9.5	812.8	793.8	9.5	635.0	622.3	292.0
	750	863.6	844.6	9.5	762.0	743.0	9.5	635.0	609.6	285.0
	700	863.6	844.6	9.5	711.2	692.2	9.5	635.0	596.9	283.0
900×900	36×36	914.4	895.4	9.5	914.4	895.4	9.5	673.1	673.1	331.0
	850	914.4	895.4	9.5	863.6	844.6	9.5	673.1	660.4	326.0
	800	914.4	895.4	9.5	812.8	793.8	9.5	673.1	647.7	323.0
	750	914.4	895.4	9.5	762.0	743.0	9.5	673.1	635.0	317.0

径の呼び(母管側 × 枝管側)		大径側			小径側			中心から端面 までの距離		概略重量
(A)	(B)	外径	内径	厚さ	外径	内径	厚さ	C	M	kg
		OD ₁	ID ₁	t ₁	OD ₂	ID ₂	t ₂			
950 × 950	38 × 38	965.2	946.2	9.5	965.2	946.2	9.5	711.2	711.2	369.0
900	36	965.2	946.2	9.5	914.4	895.4	9.5	711.2	711.2	367.0
850	34	965.2	946.2	9.5	863.6	844.6	9.5	711.2	698.5	362.0
800	32	965.2	946.2	9.5	812.8	793.8	9.5	711.2	685.8	357.0
1000 × 1000	40 × 40	1016.0	997.0	9.5	1016.0	997.0	9.5	749.3	749.3	410.0
950	38	1016.0	997.0	9.5	965.2	946.2	9.5	749.3	749.3	407.0
900	36	1016.0	997.0	9.5	914.4	895.4	9.5	749.3	736.6	402.0
850	34	1016.0	997.0	9.5	863.6	844.6	9.5	749.3	723.9	396.0
1050 × 1050	42 × 42	1066.8	1047.8	9.5	1066.8	1047.8	9.5	762.0	711.2	421.0
1000	40	1066.8	1047.8	9.5	1016.0	997.0	9.5	762.0	711.2	419.0
950	38	1066.8	1047.8	9.5	965.2	946.2	9.5	762.0	711.2	417.0
900	36	1066.8	1047.8	9.5	914.4	895.4	9.5	762.0	711.2	415.0
1100 × 1100	44 × 44	1117.6	1098.6	9.5	1117.6	1098.6	9.5	812.8	762.0	475.0
1050	42	1117.6	1098.6	9.5	1066.8	1047.8	9.5	812.8	762.0	472.0
1000	40	1117.6	1098.6	9.5	1016.0	997.0	9.5	812.8	749.3	467.0
950	38	1117.6	1098.6	9.5	965.2	946.2	9.5	812.8	736.6	462.0
1150 × 1150	46 × 46	1168.4	1149.4	9.5	1168.4	1149.4	9.5	850.9	800.1	520.0
1100	44	1168.4	1149.4	9.5	1117.6	1098.6	9.5	850.9	800.1	518.0
1050	42	1168.4	1149.4	9.5	1066.8	1047.8	9.5	850.9	787.4	512.0
1000	40	1168.4	1149.4	9.5	1016.0	997.0	9.5	850.9	774.7	507.0
1200 × 1200	48 × 48	1219.2	1200.2	9.5	1219.2	1200.2	9.5	889.0	838.2	568.0
1150	46	1219.2	1200.2	9.5	1168.4	1149.4	9.5	889.0	838.2	566.0
1100	44	1219.2	1200.2	9.5	1117.6	1098.6	9.5	889.0	838.2	563.0
1050	42	1219.2	1200.2	9.5	1066.8	1047.8	9.5	889.0	812.8	554.0

鋼板製 T X S寸法・重量表

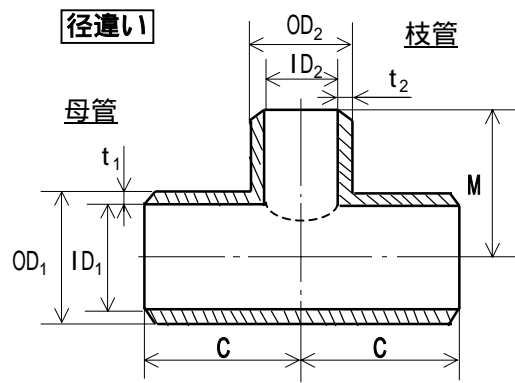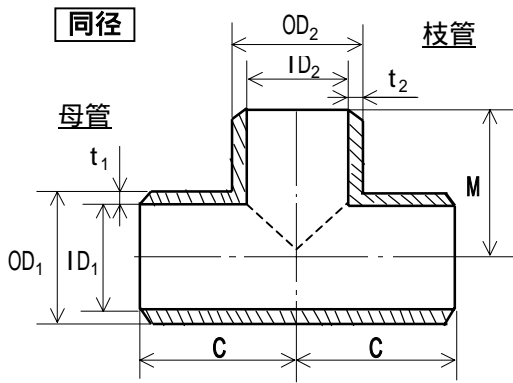

単位：mm

径の呼び(母管側 × 枝管側)		大径側			小径側			中心から端面までの距離		概略重量
(A)	(B)	外径 OD ₁	内径 ID ₁	厚さ t ₁	外径 OD ₂	内径 ID ₂	厚さ t ₂	C	M	kg
400 × 400	16 × 16	406.4	381.4	12.7	406.4	381.4	12.7	304.8	304.8	87.7
	350	406.4	381.4	12.7	355.6	330.6	12.7	304.8	304.8	86.0
	300	406.4	381.4	12.7	318.5	293.5	12.7	304.8	295.3	83.9
	250	406.4	381.4	12.7	267.4	242.4	12.7	304.8	282.6	81.5
450 × 450	18 × 18	457.2	432.2	12.7	457.2	432.2	12.7	342.9	342.9	111.0
	400	457.2	432.2	12.7	406.4	381.4	12.7	342.9	330.2	108.0
	350	457.2	432.2	12.7	355.6	330.6	12.7	342.9	330.2	106.0
	300	457.2	432.2	12.7	318.5	293.5	12.7	342.9	320.7	104.0
500 × 500	20 × 20	508.0	483.0	12.7	508.0	483.0	12.7	381.0	381.0	138.0
	450	508.0	483.0	12.7	457.2	432.2	12.7	381.0	368.3	134.0
	400	508.0	483.0	12.7	406.4	381.4	12.7	381.0	355.6	131.0
	350	508.0	483.0	12.7	355.6	330.6	12.7	381.0	355.6	129.0
550 × 550	22 × 22	558.8	533.8	12.7	558.8	533.8	12.7	419.1	419.1	167.0
	500	558.8	533.8	12.7	508.0	483.0	12.7	419.1	406.4	163.0
	450	558.8	533.8	12.7	457.2	432.2	12.7	419.1	393.7	159.0
	400	558.8	533.8	12.7	406.4	381.4	12.7	419.1	381.0	156.0
600 × 600	24 × 24	609.6	584.6	12.7	609.6	584.6	12.7	431.8	431.8	185.0
	550	609.6	584.6	12.7	558.8	533.8	12.7	431.8	431.8	183.0
	500	609.6	584.6	12.7	508.0	483.0	12.7	431.8	431.8	181.0
	450	609.6	584.6	12.7	457.2	432.2	12.7	431.8	419.1	177.0
650 × 650	26 × 26	660.4	635.4	12.7	660.4	635.4	12.7	495.3	495.3	234.0
	600	660.4	635.4	12.7	609.6	584.6	12.7	495.3	486.2	229.0
	550	660.4	635.4	12.7	558.8	533.8	12.7	495.3	469.9	225.0
	500	660.4	635.4	12.7	508.0	483.0	12.7	495.3	457.2	221.0
700 × 700	28 × 28	711.2	686.2	12.7	711.2	686.2	12.7	520.7	520.7	253.0
	650	711.2	686.2	12.7	660.4	635.4	12.7	520.7	520.7	250.0
	600	711.2	686.2	12.7	609.6	584.6	12.7	520.7	508.0	244.0
	550	711.2	686.2	12.7	558.8	533.8	12.7	520.7	495.3	242.0
750 × 750	30 × 30	762.0	737.0	12.7	762.0	737.0	12.7	558.8	558.8	304.0
	700	762.0	737.0	12.7	711.2	686.2	12.7	558.8	546.1	301.0
	650	762.0	737.0	12.7	660.4	635.4	12.7	558.8	546.1	296.0
	600	762.0	737.0	12.7	609.6	584.6	12.7	558.8	533.4	291.0
800 × 800	32 × 32	812.8	787.8	12.7	812.8	787.8	12.7	596.9	596.9	331.0
	750	812.8	787.8	12.7	762.0	737.0	12.7	596.9	584.2	324.0
	700	812.8	787.8	12.7	711.2	686.2	12.7	596.9	571.5	319.0
	650	812.8	787.8	12.7	660.4	635.4	12.7	596.9	571.5	317.0
850 × 850	34 × 34	863.6	838.6	12.7	863.6	838.6	12.7	635.0	635.0	392.0
	800	863.6	838.6	12.7	812.8	787.8	12.7	635.0	622.3	389.0
	750	863.6	838.6	12.7	762.0	737.0	12.7	635.0	609.6	380.0
	700	863.6	838.6	12.7	711.2	686.2	12.7	635.0	596.9	377.0
900 × 900	36 × 36	914.4	889.4	12.7	914.4	889.4	12.7	673.1	673.1	441.0
	850	914.4	889.4	12.7	863.6	838.6	12.7	673.1	660.4	434.0
	800	914.4	889.4	12.7	812.8	787.8	12.7	673.1	647.7	431.0
	750	914.4	889.4	12.7	762.0	737.0	12.7	673.1	635.0	422.0

径の呼び(母管側 × 枝管側)		大径側			小径側			中心から端面 までの距離		概略重量
(A)	(B)	外径 OD ₁	内径 ID ₁	厚さ t ₁	外径 OD ₂	内径 ID ₂	厚さ t ₂	C	M	kg
950 × 950	38 × 38	965.2	940.2	12.7	965.2	940.2	12.7	711.2	711.2	492.0
900	36	965.2	940.2	12.7	914.4	889.4	12.7	711.2	711.2	489.0
850	34	965.2	940.2	12.7	863.6	838.6	12.7	711.2	698.5	482.0
800	32	965.2	940.2	12.7	812.8	787.8	12.7	711.2	685.8	475.0
1000 × 1000	40 × 40	1016.0	991.0	12.7	1016.0	991.0	12.7	749.3	749.3	546.0
950	38	1016.0	991.0	12.7	965.2	940.2	12.7	749.3	749.3	543.0
900	36	1016.0	991.0	12.7	914.4	889.4	12.7	749.3	736.6	535.0
850	34	1016.0	991.0	12.7	863.6	838.6	12.7	749.3	723.9	528.0
1050 × 1050	42 × 42	1066.8	1041.8	12.7	1066.8	1041.8	12.7	762.0	711.2	562.0
1000	40	1066.8	1041.8	12.7	1016.0	991.0	12.7	762.0	711.2	559.0
950	38	1066.8	1041.8	12.7	965.2	940.2	12.7	762.0	711.2	556.0
900	36	1066.8	1041.8	12.7	914.4	889.4	12.7	762.0	711.2	553.0
1100 × 1100	44 × 44	1117.6	1092.6	12.7	1117.6	1092.6	12.7	812.8	762.0	633.0
1050	42	1117.6	1092.6	12.7	1066.8	1041.8	12.7	812.8	762.0	629.0
1000	40	1117.6	1092.6	12.7	1016.0	991.0	12.7	812.8	749.3	622.0
950	38	1117.6	1092.6	12.7	965.2	940.2	12.7	812.8	736.6	615.0
1150 × 1150	46 × 46	1168.4	1143.4	12.7	1168.4	1143.4	12.7	850.9	800.1	694.0
1100	44	1168.4	1143.4	12.7	1117.6	1092.6	12.7	850.9	800.1	690.0
1050	42	1168.4	1143.4	12.7	1066.8	1041.8	12.7	850.9	787.4	683.0
1000	40	1168.4	1143.4	12.7	1016.0	991.0	12.7	850.9	774.7	676.0
1200 × 1200	48 × 48	1219.2	1194.2	12.7	1219.2	1194.2	12.7	889.0	838.2	758.0
1150	46	1219.2	1194.2	12.7	1168.4	1143.4	12.7	889.0	838.2	754.0
1100	44	1219.2	1194.2	12.7	1117.6	1092.6	12.7	889.0	838.2	751.0
1050	42	1219.2	1194.2	12.7	1066.8	1041.8	12.7	889.0	812.8	739.0